


KINREI

MODEL B-450

φ 450 DOUBLE TWIST BUNCHER

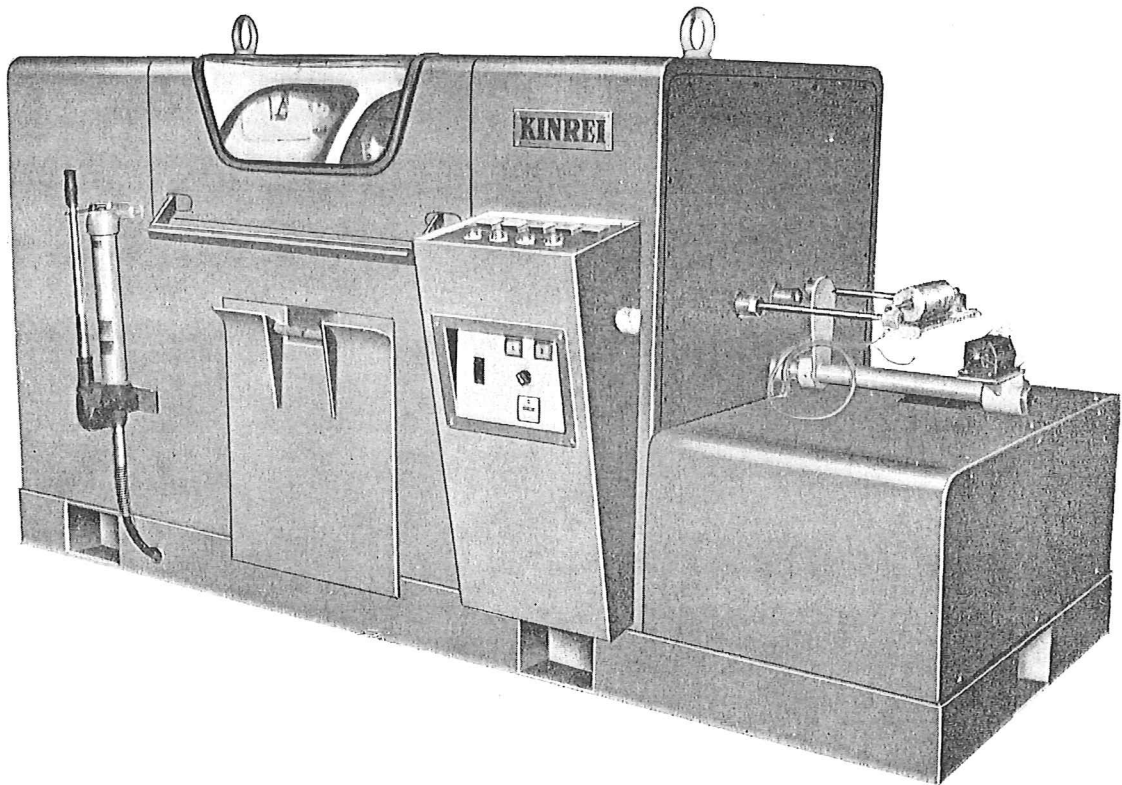

MAX. 2,000r.p.m. — 4,000twist/min.



**KINREI
MACHINERY (1934)
Co., Ltd.**

Flange type rotating plate and steel bow used for this machine avoid air pressure, so makes machine very quiet, and minimize the vibration.



KINREI

Fine-Wire Bunching Machines, MODEL B-450

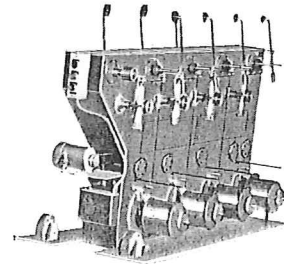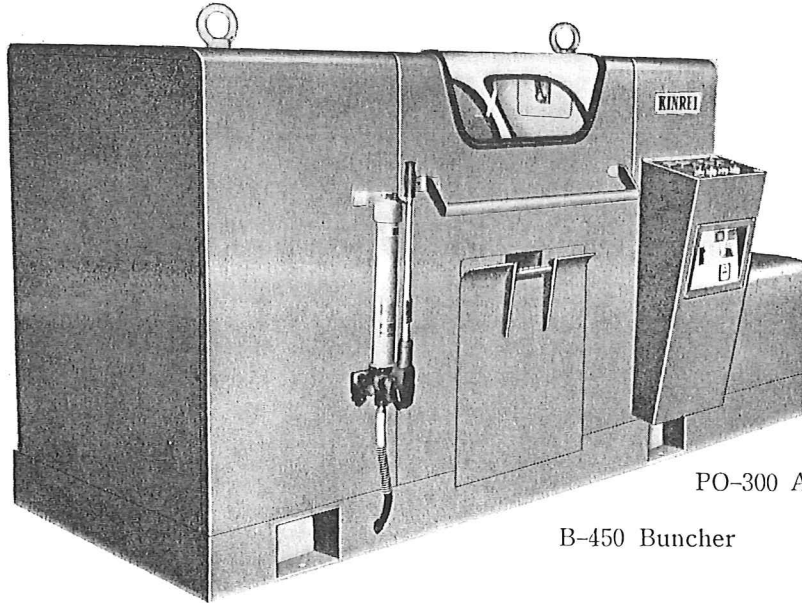

PO-300 AUTOMATIC PAY-OFF STAND


B-450 Buncher

Specifications

Speed	2000. 1600. 1250. r.p.m.
Take-up drum.	Flangedia : ϕ 450 O. A. W : W 300
Capacity.	Abt. 150 kg.
Finished wire.	0.055 - 1.25 mm ² .
Lay range.	4.5-36 mm.
Start / Brake.	Powder coupling / Electro magnetic brake.
Motor.	2.2 kw Induction motor.
Noise.	Abt. 75 ph.
Floor space.	2440 × 950 × 1225 Hmm.
Machine weight.	Abt. 2000 kg.

Option

- * Automatic pay-off stand with tension controls.
- * Drum.
- * Automatic controll equipment.

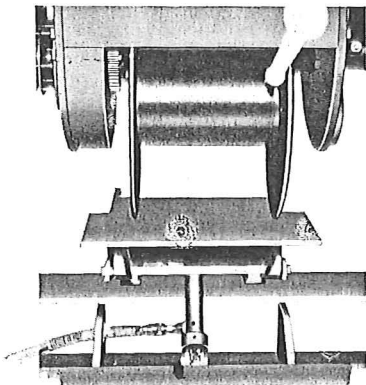

Agency

※ Specifications are subject to changes without previous notice.